



LoRaWAN® LUMINAIRE CONTROLLER IP68 UL2014



LoRaWAN® Luminaire Controller is a remote controlling device for LED and HID luminaries using 0...10V analog or DALI control signal.

Control commands from/to dedicated application are to be sent/received using LoRaWAN® network.

FW version >= 0.6.29



OVERVIEW

Universal

Supports LED and HID luminaires.

APPLICATIONS

Luminaires control

Supports customisable dimming profiles together with various configurable inputs (light intensity, movement etc.).

Array control

Allows to control an array of 32 luminaires over the DALI interface

Auxiliary light control (optional)

Relay for auxiliary light control (decorative lighting etc.).

Power monitoring

Monitor used power and luminaire burn time

FEATURES

- DALI interface
- Relay control
- Luminaire intensity control
- Thermistor input
- Digital input (e.g. movement sensor)
- Analog input (e.g. reflected light level)
- Sensor power supply
- IP68
- Surge protection
- Power metering



SPECIFICATIONS

Length:	134.0 mm
Width:	54.0 mm
Depth:	33.0 mm
Weight:	ca 260 g
Operating temperature:	-30°C ... +60°C
Power consumption:	230V -15% .. +10% <1V A
Communication range:	up to 15 km* LoRaWAN [®]
Tx power:	up to +20 dBm
Rx Sensitivity:	-140 dBm
MAC Layer:	LoRaWAN [®]
Physical Layer:	LoRa [®]
Body material:	ABS
IP Rating:	IP68
Communication:	LoRaWAN [®] , Bluetooth LE (for configuration)

* Communication range is dependent on the location of the sensor and nearest base station.

INTERFACE SPECIFICATIONS


Relay max current:	6A
Surge protection:	IEC 61000-4-5 Class 4 (4kV)
Intensity control output voltage:	0V .. 10V
DALI Interface max number of slaves on (int. power supply):	32
Thermistor input:	12V tolerant
Digital input:	12V tolerant
Analog input:	12V tolerant*
AUX relay max current:	2A (optional)
External Sensor Power supply:	Output voltage: 12V Max output current: 50mA

* Not used together with optional AUX relay.



DIMENSIONS / PACKAGING


Dimensions

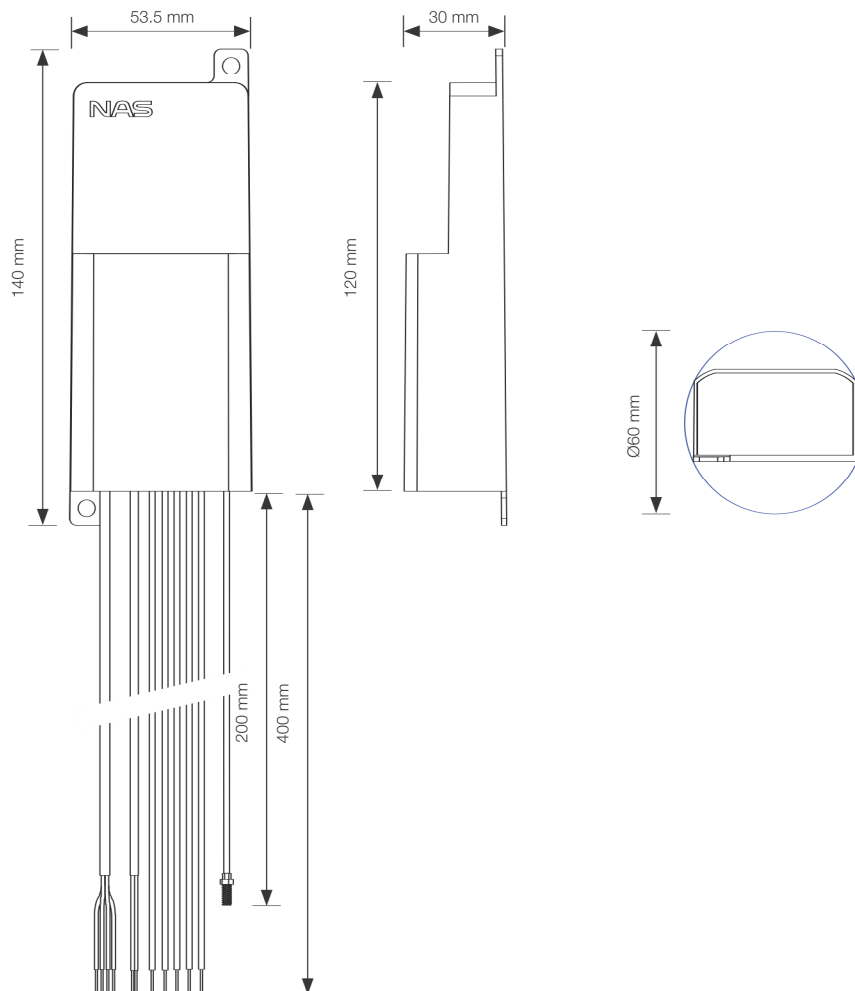

ACCESSORIES



ORDERING INFORMATION

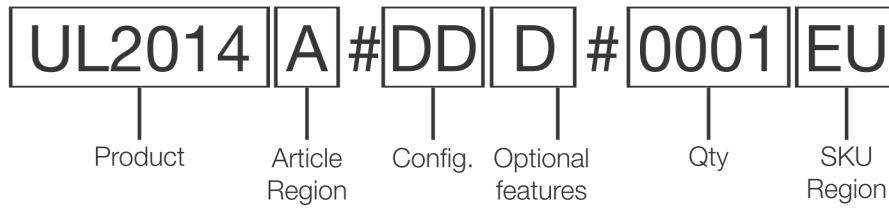

Product/SKU	Package qty	IP Rating
UL2014x#xx#0001xx	1	IP68

Article region	SKU region	Frequency
A	EU	868 MHz
B	AU	922 MHz
C	US	915 MHz
D	AS	923 MHz
F	KR	922 MHz
I	IN	866 MHz

Model	Description	Optional features (Choose only 1 from each column)			
UL2014	DD - DALI only DC - DALI & NC relay AC - 0..10V & NC relay UC - DALI & 0..10V & NC relay	T - THR	D - DIG	L - LDR O - Relay 2	X* - custom request

* Custom request must be verified with sales before ordering. On order X must be accompanied with the description of agreed functionality.



CONTACT INFORMATION

Nordic Automation Systems AS

www.nasys.no

info@nasys.no

All content contained herein is subject to change without notice. Nordic Automation Systems reserves the right to change or modify the content at any time.